

## SERIES 8900 SLIDING WINDOW

- + **Exclusive InsulKor™** polyurethane fiberglass-enriched sash reinforcement for superior thermal and structural performance
- + **Fusion-welded sashes and frame** add strength and boost insulation
- + **Low-E glass** with insulating argon gas yields outstanding thermal efficiency
- + **DP-50 rating** (window size tested 72" x 48")
- + **Beveled mainframe** offers a stylish exterior appearance
- + **4 1/4" frame thickness** enhances appearance as well as structural integrity
- + **External accessory groove** accommodates nail fin option
- + **Full screen** is standard and removable from the inside\*
- + **Dual low profile, positive-action cam locks** increase security (2 locks standard at 27 1/4" width or higher)
- + **Full interlocking lock and meeting rail**
- + **Integrated glide channel** for easy sash opening and closing
- + **Tandem rollers** ride easily along friction-free glide channel
- + **Available in 1/4 - 1/2 - 3/4 or 1/3 - 2/3 - 1/3 configurations**
- + **XX 2-lite configuration** (both sashes operate)
- + **3.25" jamb depth** for ideal window sizing
- + **Transferable limited lifetime warranty**
- + **Lifetime glass breakage warranty**



2-lite sliding window



3-lite sliding window


### CUSTOM Options

- + **Low-E Glass**
- + **Ultra Low-E Glass + Argon Gas**
- + Triple-pane, R-5 compliant glass panels
- + InsulKor™ multi-cavity foam-filled frame injections
- + Nail fin accessory for use in remodeling or new construction applications
- + 1 1/8" simulated divided lite (SDL) grid
- + 5/8" or 1" contoured, 5/8" or 3/4" flat, 5/8" contoured valance grids available
- + Obscure or double strength glass
- + Charcoal aluminum, Clear View and heavy duty screens\*


INSULKOR™  
TECHNOLOGY



### + COLOR OPTIONS\*\*

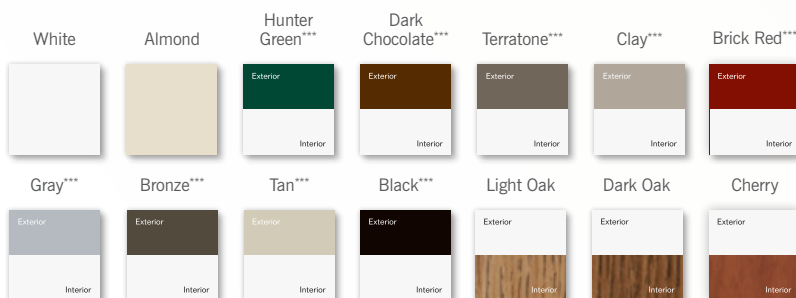

### + LOCK OPTIONS\*\*



Scan to watch a video about our Series 8900.



ENERGY STAR compliance available in all series. Verify product specifics before ordering.

Note: Manufacturer reserves the right to substitute components as necessary for continued product improvement.

\* Screens are not meant to restrain a child from falling through an open window.

\*\* Printing process may affect color shown. Please refer to actual window sample when selecting colors.

\*\*\* Grid offering limited to 5/8" contoured or SDL on exterior painted windows. Only use mild, water based household cleaner on painted product and rinse immediately with water. See full cleaning instructions for details.

